

## MARKUS FLUSH SLIDING DOOR TYPE PRIMUS



**markus**



**MARKUS HERMETISCHE DEUREN B.V.**  
Griendstraat 11, 2921 LA Krimpen aan den IJssel  
P.O.Box 46, 2920 AA Krimpen aan den IJssel  
The Netherlands  
Tel. +31-180-51.44.66, Fax +31-180-51.77.01



HANDBEDIENDE SCHUIFDEUR  
HANDBETÄTIGTE SCHIEBETÜR  
MANUAL SLIDING DOOR  
PORTE COULISSANTE MANUELLE

type PRIMUS

niet hermetisch sluitend - nicht hermetisch schließend - non-hermetic sealing - fermeture pas-hermétique

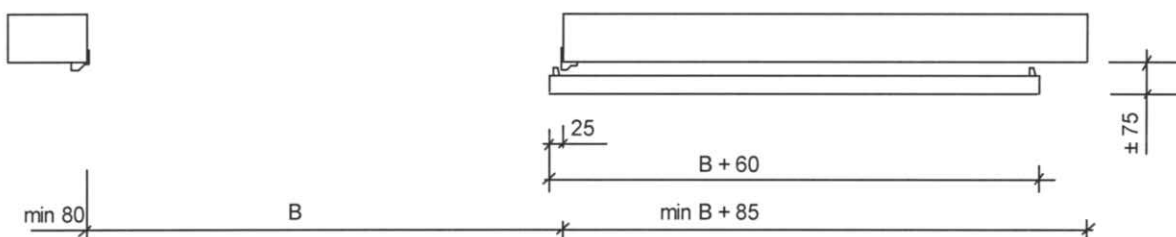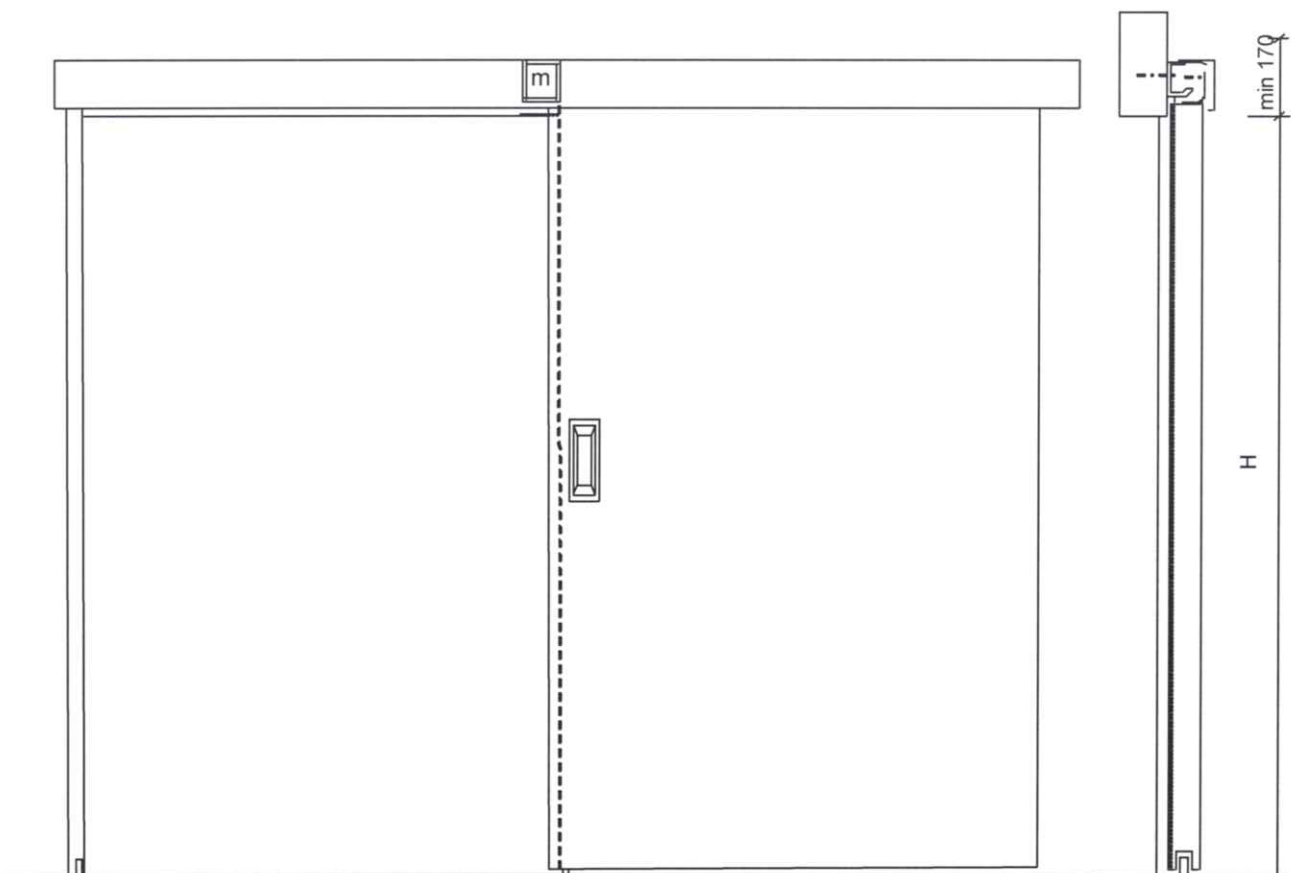



## FLUSH SLIDINGDOOR

## TYPE PRIMUS

### Products specifications

non hermetic sealing

<b>Doorcase</b>	To be supplied by the contractor, in accordance with a drawing to be provided by Markus. To this frame, on the left and right hand side, special metal profiles will be attached. The clear opening of the frame = free passage width + 25 mm
<b>Doorleaf</b>	Thickness 40 mm, with a core of compressed flaxfiber, Abachi edges double on top and at the bottom, and a Mendeboardpanel on both sides.
<b>Finish</b>	on both sides plastic laminate, Perstorp or Formica OV, in one regular available uni-colour the vertical dooredges provided with a glued-on vertical plastic profile, available either in the colour white RAL-9010 or grey RAL -7035
<b>Rubbergasket</b>	on both sides a vertical EPDM-rubber gasket, with a dual function: damping of the slidingforces and vertical sealing of the gap between doorleaf and the special profiles attached to the doorcase.
<b>Operation</b>	on both sides a satin anodised aluminium recessed grip.
<b>Track</b>	solid satin anodised aluminium Markus trackprofile
<b>Suspension</b>	two galv. steel brackets, each with a nylon roller-bearing, in combination with a nylon pressure roller
<b>Endpositioning</b>	at both ends of the track a rubber "catcher"
<b>Trackcover</b>	light, detachable, aluminiumcoloured trackcover, at both ends bended towards the wall.
<b>Bottom guiding</b>	in the bottompart of the doorleaf an aluminium U-shaped guiding profile. In front of the frameposts a wearproof nylon guiding cam, placed over a stainless steel pin, which is fixed in the floor.
<b>Options</b>	<b>available at extra charge</b>
<b>Operation</b>	on both sides a satin anodised aluminium fixed grip Ø25x300 mm, because of these grips is the free passage width: clear opening of the doorcase minus 120 mm
<b>Lock</b>	Markus lock, vertical incorporated within the doorleaf, locking in the track available as a cylinderlock, suited for an euronorm profile-cylinder (cylinder not included), or as a toiletlock because of the lock is the free passage width: clear opening of the doorcase minus 120 mm
<b>Automation</b>	electric automation unit with matching track-cover, screw-on type, photocell and reverse-function. Included in the delivery are 2 standard pushbuttons, plastic 80x80 mm.
<b>Finish</b>	other than above mentioned brands, colours or designs of plastic laminate, are available on request only.

subject to changes 08-11-2002

MARKUS HERMETISCHE DEUREN B.V.  
Griendstraat 11 - Postbus 46  
NL 2920 AA Krimpen aan den IJssel  
Telf.+31 180 514466 Fax +31 180 517701  
e-mail [info@markus-deuren.nl](mailto:info@markus-deuren.nl)